

RMT-ALLACCESS-KIT

Complete Touchless
Door Access Controller



The ZKTeco ABC door access RMT- ALLACCESS is a secure, convenient, and easy-to-install solution that eliminates the need for keys or PIN codes. This makes it ideal for businesses and organizations that want to improve security while also making it easier for employees and visitors to access doors and facilities.

SECURE

Biometric readers use unique features of your body to identify you, making them much more secure than keys or PINs. The kit also includes a Secure Relay Board (SRB) that connects to the door lock. This provides an added layer of security in case the biometric reader is damaged or stolen.

CONVENIENT

This touchless biometric reader provides fast & convenient door access. No more fumbling with keys or remembering a PIN. Simply glance at the reader or position your palm in front of it to unlock the door.

SIMPLE TO INSTALL


This touchless biometric reader installs just like an electronic keypad reader. Simply connect the reader to a standard 12v power source, connect its relay to the SRB, and then connect the SRB to the electronic door lock (door lock sold separately).

If you need help, the RMT - ALLACCESS also includes 30 days of FREE technical support!


NO MORE ACCIDENTAL LOCKOUTS!

Enjoy **fast, simple, secure and convenient door access** by ordering your RMT- ALLACCESS today. Email info@zktecousa.com for more information.

STANDALONE INSTALLATION

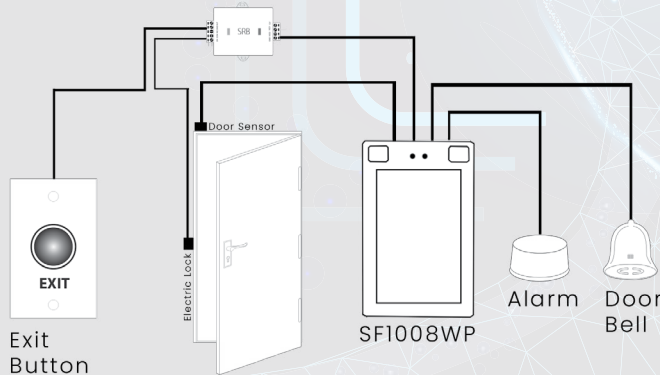

DIMENSIONS

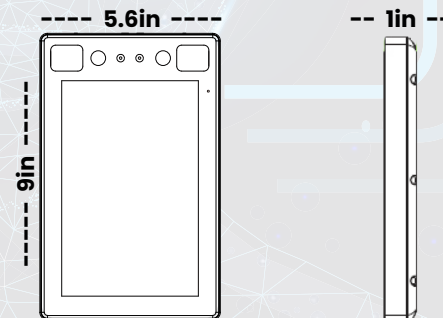

SPECIFICATIONS

Capacity

Faces: 50,000 (1:N)
Palms: 5,000 (1:N)
Users/Cards: 50,000
Transactions: 1,000,000
User Photos: 30,000
Event Photos: 10,000

Compatibility

Security Relay Box
Wiegand / RS485 / RS232 / OSDP
Secondary Reader with Fingerprint /
RFID / Bar code / QR Code / Multi-Class
also available
ZKBioSecurity Software

Hardware

900MHz Dual Core Customized AI CPU
512 MB RAM / 8G Flash
8" Bright Light (400lux) IPS Touch LCD
125KHz EM Reader/ 13.56MHz MF
(optional)
Adjustable Light Brightness LED
Hi-Fi Voice
Receiver Sensitivity Microphone
Distance detection Sensor
Reset Button and Tamper Switch

Access Control Interface

Lock Relay Output
Alarm Output / Auxiliary Input Exit Button /
Door Sensor

Special Functions

IP68 & IK04
0.3s High Speed Facial Verification Live Face
Detection
Event Snapshot
Communication HTTPS Encrypted (optional)

Standard Functions

Access Levels, Groups, Holidays, DST, Duress
Mode (password), Anti-Passback, Record
Query, Wallpaper & Screen Saver,

Communication

TCP / IP
Wiegand Input / Output
Wi-Fi (optional)
RS485 / RS232

Additional Info

Face Algorithm: ZKLiveFace 5.8
Working Temp.: -22 F to 140 F
Working Humidity: < 93%
Storage Temp: -40 F to 149 F
Storage Humidity: < 93%
Net Weight: 1.88 lbs Dimension
(HLD): 8.9 x 5.6 x 1 inches

Power

Operating Voltage 12V DC
Current Draw < 2,000mA
Tamper Switch Alarm