



## QR502-V

Outdoor QR Code & Prox card Reader



IP65



RFID



QR Code

QR502-V is an outdoor-rated vandal-resistant QR code reader. It can additionally read both ZKTeco 125 kHz prox cards and most 13.56 MHz smart cards. QR502-V is single-gang size and has a vertical footprint. It connects with ZKTeco Atlas 2.6 (or higher), ZKBioSecurity, or any 3rd party access control system capable of generating QR codes.

## Features


- QR code & RFID keypad reader
- IP65-rated and vandal resistant (metal enclosure)
- Dynamic QR code with ZKey Mobile Credential APP
- Supports QR code: QR, Data matrix, PDF417, GS1 Databar, Code 128/EAN128, UPC/EAN, Codabar, Code 39/ Code 93 etc.
- Communication : Wiegand 26/34/66 (default) & RS485.
- Supports 125kHz ID cards or 13.56MHz IC cards, which includes Mifare, Desfire EV1

(Note: Card + QR Function , Cannot be used together)


## Specifications

Model	QR502-V
QR Sensor	QR, Data matrix, PDF417, GS1 Databar, Code 128/EAN128, UPC/EAN, Codabar, Code 39/ Code 93 etc.
RFID	125kHz ID cards / 13.56mHz IC Cards: Mifare & Desfire EV1
Reading Distance	Up to 2 inches
Communication	Wiegand & RS485
Protection	IP65
Power	12V DC (± 5%)
Operating Temperature	-4°F to 140°F
Storage Temperature	-4°F to 176°F
Operating Humidity	20% to 80%
Dimensions	138*58*16 (mm) / 5.43 x 2.28 x 0.63 (in)
Mount	Single-Gang


## Dimensions (mm)

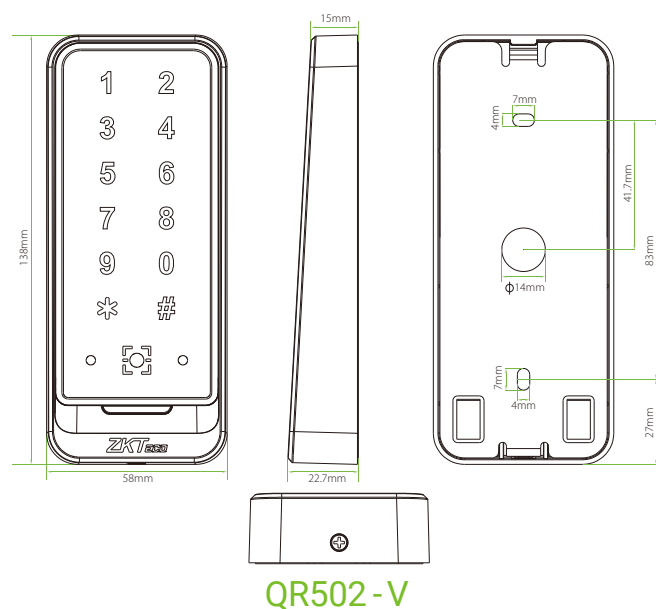

## 2 Configuration Options

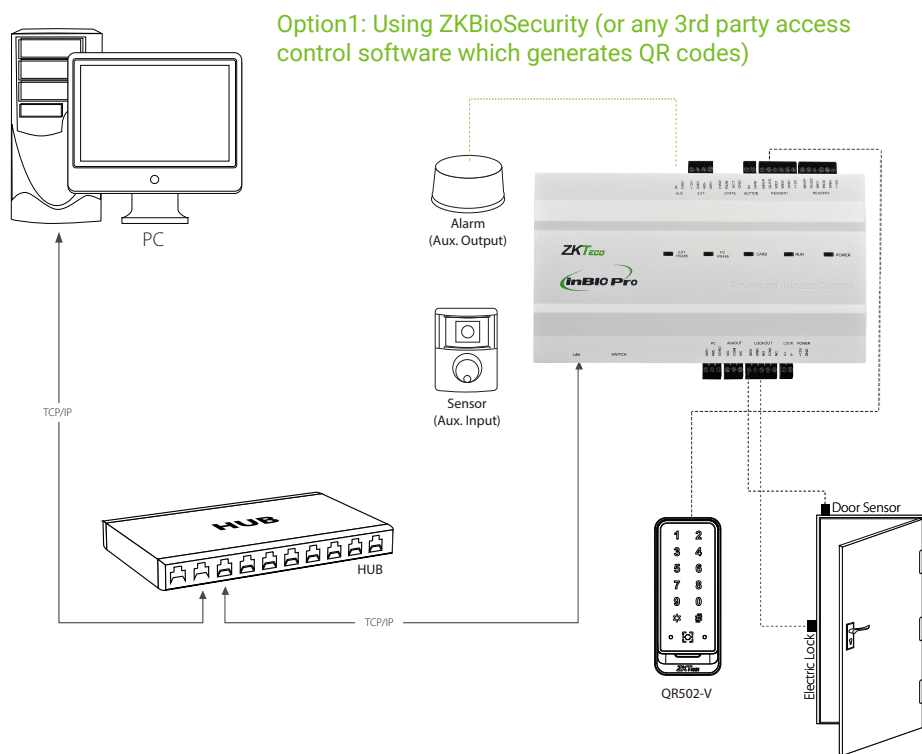

**Option 2: Using Atlas v2.6 (or higher)**

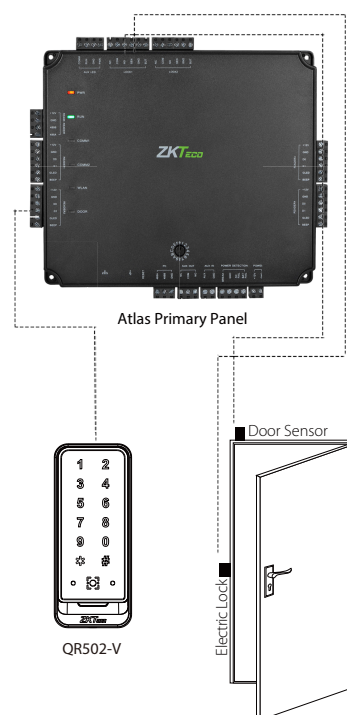

## ZKTeco USA

1600 Union Hill Rd., Alpharetta GA 30005

Phone: (862) 505 - 2101 • Fax: (862) 204 - 5906 • sales@zktcouusa.com • www.zktcouusa.com

© Copyright 2020. ZKTeco Inc. ZKTeco Logo and ZKTeco USA Logo have registered trademarks of ZKTeco or a related company.

All other product and company names mentioned are used for identification purposes only and may be trademarks of their respective owners.

All specifications are subject to change without notice. All rights reserved.